



# MIDWAY

RECESSED COLLECTION



2"

## 45365 MINI SQUARE GIMBAL



The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_



2700K . 3000K . 3500K . 4000K . 5000K

### SPECIFICATIONS

#### LIGHT HOUSING

- IC Airtight Cast aluminum body.
- Remodel application. C/W spring loaded clips.
- Mates to driver box with quick connector.
- Max Ceiling thickness 5/8".
- Approved for damp location.

#### DIMENSIONS

- Cut hole:  $\varnothing 2 \frac{1}{8}$ ".
- Fixture:  $\varnothing 2 \frac{1}{2}$ " x  $1 \frac{1}{2}$ "H.

#### ELECTRICAL

- 120 V Input class 2 constant current dimmable driver enclosed in junction box.
- TRIAC and ELV dimming.
- Min operating temperature (-4°F~104°F)(-20°C~40°C).

#### LIGHT MODULE

- 1 x 5W Integrated LED COB.
- Lumen maintenance 70% 50,000 hrs.
- CRI: 90+
- Beam angle: 38 degree.
- Kelvin (CCT): 27K | 30K | 35K | 40K | 50K
- Delivered Lumen: 373 lm | 410 lm | 421 lm | 426 lm | 429 lm

#### CERTIFICATIONS



### ORDERING GUIDE

MODEL	FINISH
45365-027	Black
45365-010	White

	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM ANGLE	ADJUSTABLE
	5W	Up to 429	CCT Selectable	TRIAC/ELV	90+	38°	30°



PRODUCT DIMENSIONS




#### FINISHES



027- Black



010- White

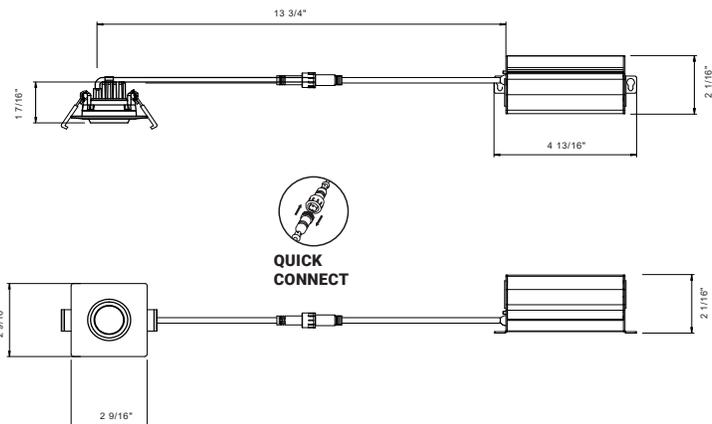

### ACCESSORIES



**45612-012**  
60"  
3 pin Connector



**45366-017**  
**NEW CONSTRUCTION PLATE**  
Mounting kit includes bars  
9" x 6 3/4"

$\varnothing 2 \frac{1}{8}$ "  
 $\varnothing 2 \frac{7}{8}$ "  
 $\varnothing 3 \frac{3}{4}$ "  
 $\varnothing 5 \frac{1}{4}$ "



**NO IC BOX REQUIRED**

www.eurofase.com

Tel: 905.695.2055 Fax: 905.695.2056  
Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390

All features, functionality and other product specifications are subject to change without notice.